

FEATURES

- ✧ Hyper fast recovery time
- ✧ Soft recovery characteristics
- ✧ Low forward voltage
- ✧ Low stored charge
- ✧ Low leakage current
- ✧ Low recovery loss
- ✧ High junction temperature
- ✧ Epitaxial planar construction

MACHANICAL DATA

- ✧ Case: DO-201AD(DO-27) outline plastic package
- ✧ Terminal: Matte tin plated, solderable per MIL-STD-750, Method 2026
- ✧ Molding Compound Flammability Rating:UL94-0
- ✧ High temperature soldering guaranteed: 260°C /10second


ORDERING INFORMATION

- ✧ Device: HFD06G40Z
- ✧ Package: DO-201AD(DO-27)
- ✧ Marking: As marked
- ✧ Material: RoHS compliant
- ✧ Packing: Tape & Ammo
- ✧ Quantity per box: 1,250pcs

APPLICATIONS

- ✧ Switching mode power supply
- ✧ Motor control
- ✧ Inverters, Converters
- ✧ Freewheeling, Snubber, PFC circuits
- ✧ Polarity protection

SYMBOL



PACKAGE OUTLINE



ABSOLUTE MAXIMUM RATING (T_{amb}=25°C, unless otherwise specified)

Symbol	Parameter	Value	Units
V _{RRM}	DC Blocking Voltage	400	V
I _{F(AV)}	Average Forward Current	6	A
I _{FSM}	Peak Forward Surge Current, 8.3ms single half sine-wave	50	A
T _J	Operating Junction Temperature	-55~+175	°C
T _{STG}	Storage Temperature	-55~+150	°C

ELECTRICAL CHARACTERISTICS (T_{amb}=25°C, unless otherwise specified)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V _F	Forward Voltage	I _F = 6A Ta=25°C		1.25	1.40	V
		I _F = 6A Ta=125°C		1.10	1.25	V
V _R	Reverse Breakdown Voltage	I _R = 50μA	400			V
I _R	Reverse Leakage Current	V _R = 400V Ta=25°C			2	μA
		V _R = 400V Ta=125°C			50	μA
T _{rr}	Reverse Recovery Time	I _F = 0.5A, I _R = 1A I _{rr} = 0.25A		20	30	ns
		I _F = 1A, V _R = 30V di/dt = -200A/μs		20		ns

ELECTRICAL CHARACTERISTICS CURVE

Fig 1 Typical Forward Current Derating Curve

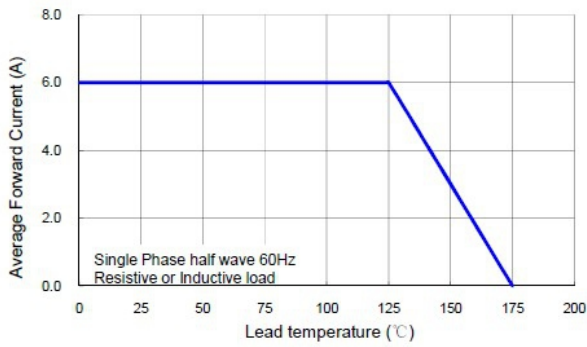


Fig 2 Max. Non-repetitive Forward Surge Current

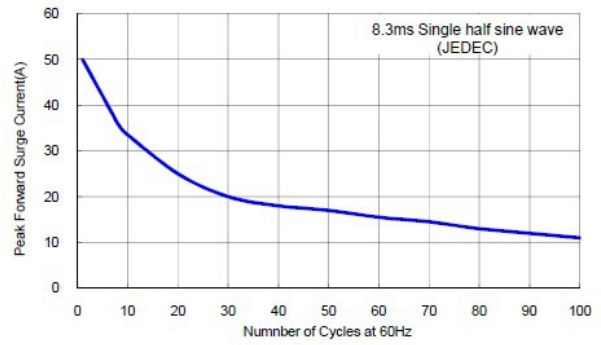


Fig 3 Typical Instantaneous Forward Characteristics



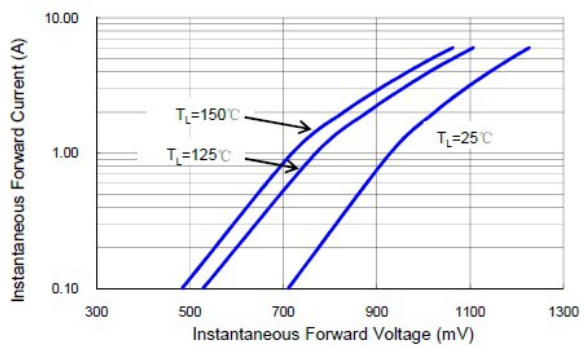


Fig 4 Typical Reverse Characteristics

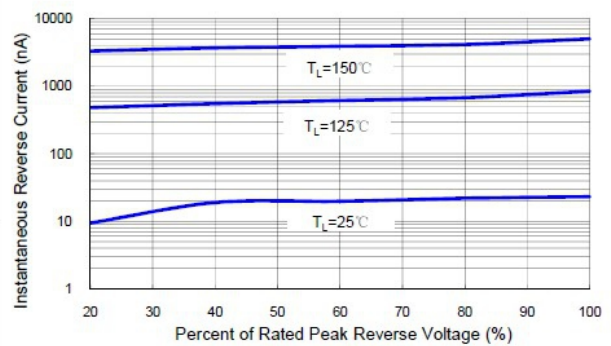

DO-201AD(DO-27) PACKAGE OUTLINE DIMENSIONS

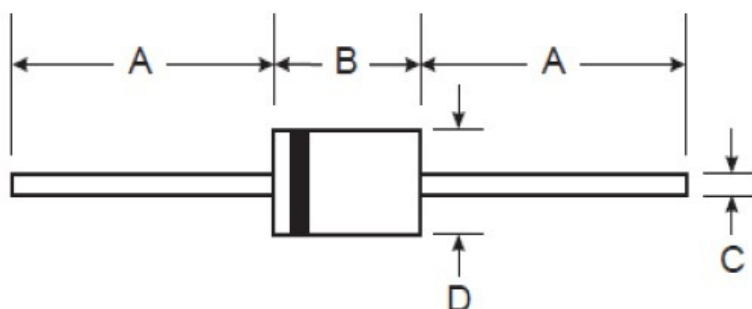

DO-201AD(DO-27) Plastic				
Dim	Min		Max	
	Inch	mm	Inch	mm
A	1.0	25.4	-	-
B	0.285	7.2	0.375	9.5
C	0.039	1.0	0.052	1.3
D	0.190	4.8	0.210	5.3