

Single Line Uni-directional Transient Voltage Suppressor

DESCRIPTION

The SD12VHHU TVS diode is designed to replace multilayer varistors (MLVs) in portable applications such as cell phones, notebooks, and PDA's. It offers superior electrical characteristics such as low clamping voltage, low leakage current and high surge capability. It is designed to protect sensitive electronic components which are connected to power lines, from over-stress caused by ESD (Electrostatic Discharge), EFT (Electrical Fast Transients) and Lighting.

The SD12VHHU is in a DFN2020-3L package and will protect one unidirectional line. It may be used to provide ESD protection up to $\pm 30\text{kV}$ (Contact and air discharge) according to IEC61000-4-2, and used to protect USB voltage bus pin (8/20 us) according to IEC61000-4-5.

ORDERING INFORMATION

- ✧ Device: SD12VHHU
- ✧ Package: DFN2020-3L
- ✧ Marking: T12 003
- ✧ Material: Halogen free and RoHS compliant
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

FEATURES

- ✧ Transient protection for high-speed data lines
IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (Contact)
 $\pm 30\text{kV}$ (Air)
- ✧ Peak power dissipation: 5760W (8/20 μs)
- ✧ Working voltages : 12V
- ✧ Low leakage current
- ✧ Low clamping voltage
- ✧ Ultra-small package (2.0mm $\times$ 2.0mm $\times$ 0.5mm)
- ✧ Solid-state silicon-avalanche technology


MACHANICAL DATA

- ✧ DFN2020-3L package
- ✧ Flammability Rating: UL 94V-0
- ✧ High temperature soldering guaranteed:
260 $^{\circ}\text{C}$ /10s
- ✧ Packaging: Tape and Reel
- ✧ Reel size: 7 inch


APPLICATIONS

- ✧ Power lines
- ✧ Personal digital assistants (PDA's)
- ✧ Microprocessors based equipment
- ✧ Notebooks, Desktops, and Servers
- ✧ Cell phone Handsets and Accessories
- ✧ Portable Electronics
- ✧ Peripherals

PIN CONFIGURATION



PACKAGE OUTLINE

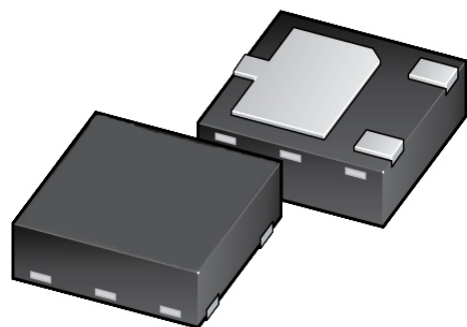

Single Line Uni-directional Transient Voltage Suppressor







ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Contact) ESD per IEC 61000-4-2 (Air)	± 30 ± 30	kV
P_{PP}	Peak Pulse Power (8/20 μ s)	5760	W
T_{OPT}	Operating Temperature	-55~125	°C
T_{STG}	Storage Temperature	-55~150	°C
T_L	Lead Soldering Temperature	260(10sec)	°C



ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$)

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
V_{RWM}	Reverse Working Voltage				12	V
V_{BR}	Reverse Breakdown Voltage	$I_T = 1mA$	13.0	14.5	16.0	V
I_R	Reverse Leakage Current	$V_{RWM} = 12V$			1	μA
I_{PP}	Peak Pulse Current	$t_p = 8/20\mu s$			180	A
V_C	Clamping Voltage	$I_{PP} = 50A, t_p = 8/20\mu s$			22	V
		$I_{PP} = 100A, t_p = 8/20\mu s$			25	V
		$I_{PP} = 180A, t_p = 8/20\mu s$			32	V
C_J	Junction Capacitance	$V_R = 0V, f = 1MHz$	900	950	1200	pF


ELECTRICAL CHARACTERISTICS CURVE

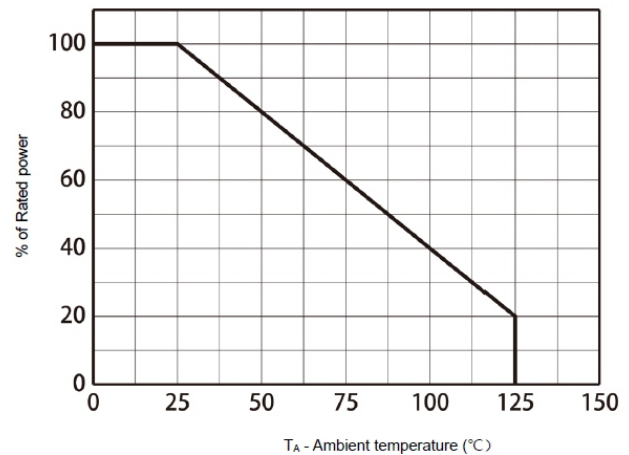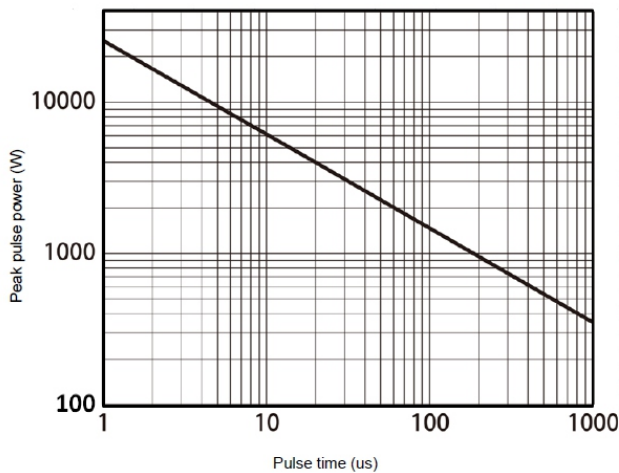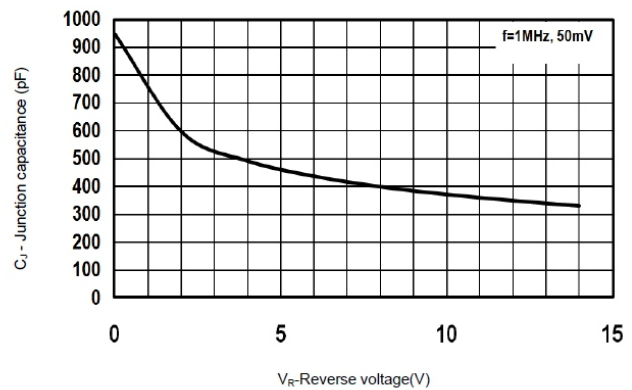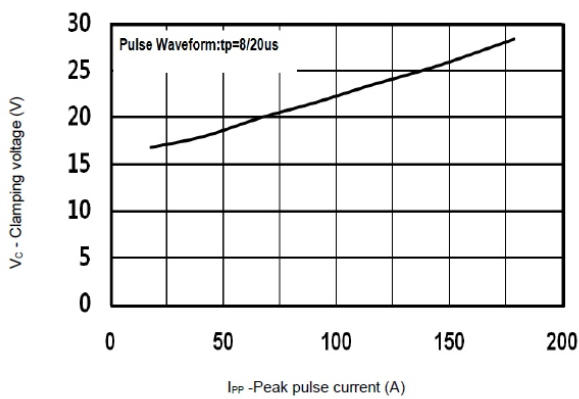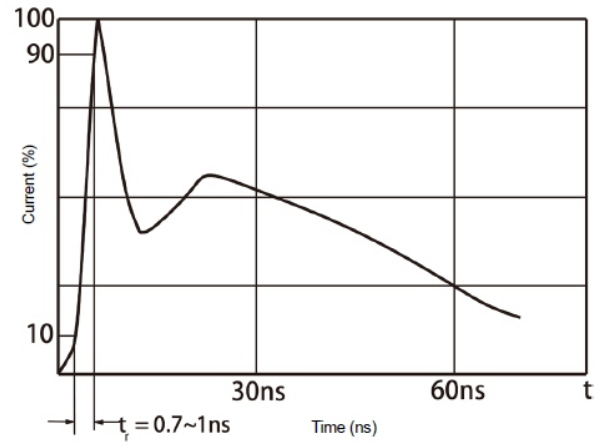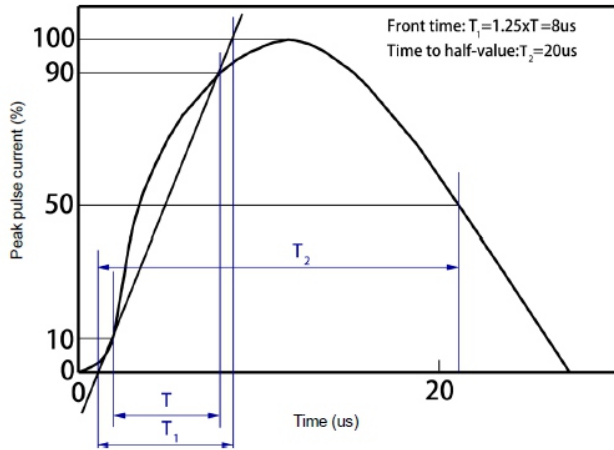

DFN2020-3L PACKAGE OUTLINE DIMENSIONS

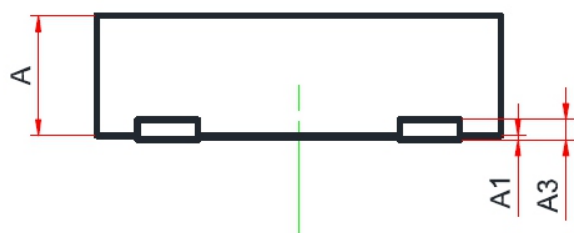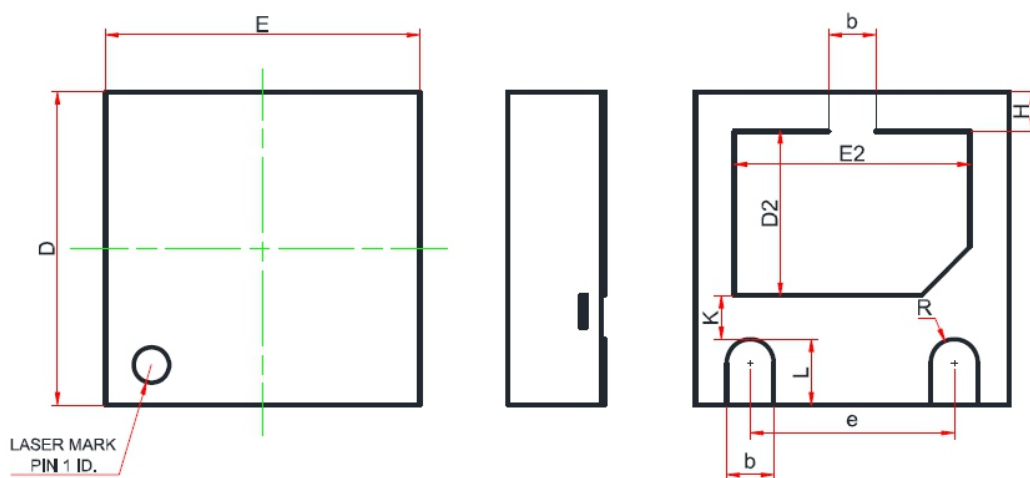

Recommend Land Pattern (Unit: mm)

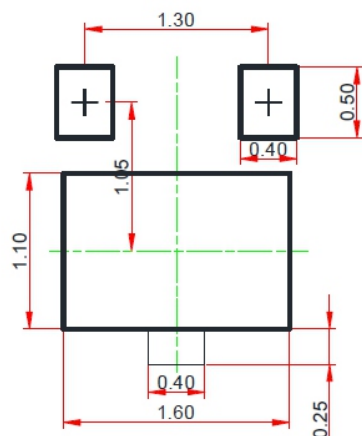

Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.51	0.55	0.60
A1	0.00	0.02	0.05
A3	0.15 REF.		
b	0.25	0.30	0.35
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.85	1.00	1.10
E2	1.35	1.50	1.60
e	1.20	1.30	1.40
H	0.20	0.25	0.30
K	0.20	0.30	0.40
L	0.35	0.40	0.45
R	0.15	-	-

Note:

This recommended land pattern is for reference purpose only.