

Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 100V

Forward Current - 2.0A

### FEATURES


- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

### MECHANICAL DATA

- Case: SMAF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 27mg / 0.00095oz

### PINNING

| PIN | DESCRIPTION |
|-----|-------------|
| 1   | Cathode     |
| 2   | Anode       |

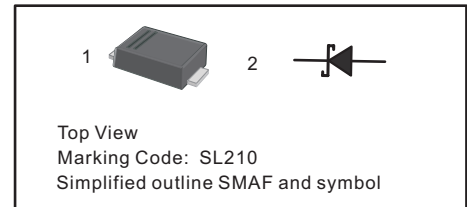

### Absolute Maximum Ratings and Electrical characteristics


Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20 %

| Parameter                                                                                          | Symbols         | SSL210F    | Units         |
|----------------------------------------------------------------------------------------------------|-----------------|------------|---------------|
| Maximum Repetitive Peak Reverse Voltage                                                            | $V_{RRM}$       | 100        | V             |
| Maximum RMS voltage                                                                                | $V_{RMS}$       | 70         | V             |
| Maximum DC Blocking Voltage                                                                        | $V_{DC}$        | 100        | V             |
| Maximum Average Forward Rectified Current                                                          | $I_{F(AV)}$     | 2.0        | A             |
| Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)  | $I_{FSM}$       | 50         | A             |
| Max Instantaneous Forward Voltage at 2 A                                                           | $V_F$           | 0.60       | V             |
| Maximum DC Reverse Current $T_a = 25^{\circ}C$<br>at Rated DC Reverse Voltage $T_a = 100^{\circ}C$ | $I_R$           | 0.3<br>3   | mA            |
| Typical Junction Capacitance <sup>(1)</sup>                                                        | $C_j$           | 110        | pF            |
| Typical Thermal Resistance <sup>(2)</sup>                                                          | $R_{\theta JA}$ | 90         | $^{\circ}C/W$ |
| Operating Junction Temperature Range                                                               | $T_j$           | -55 ~ +150 | $^{\circ}C$   |
| Storage Temperature Range                                                                          | $T_{stg}$       | -55 ~ +150 | $^{\circ}C$   |


( 1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

( 2 ) P.C.B. mounted with 2.0" X 2.0" ( 5 X 5 cm) copper pad areas.


**Fig.1 Forward Current Derating Curve**

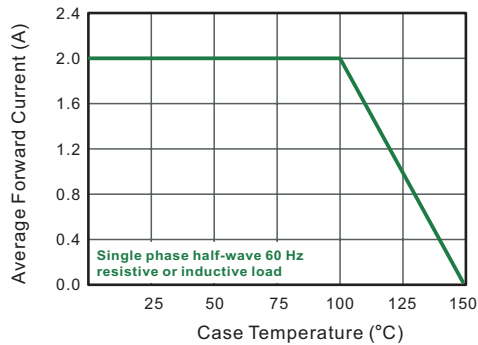


**Fig.2 Typical Reverse Characteristics**

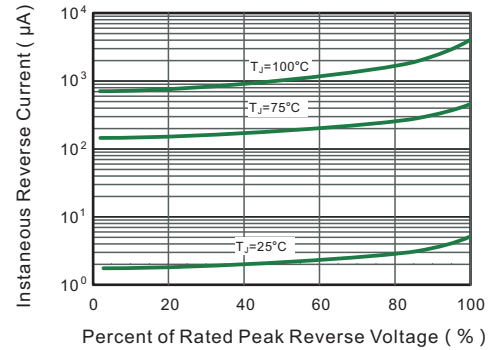


**Fig.3 Typical Forward Characteristic**

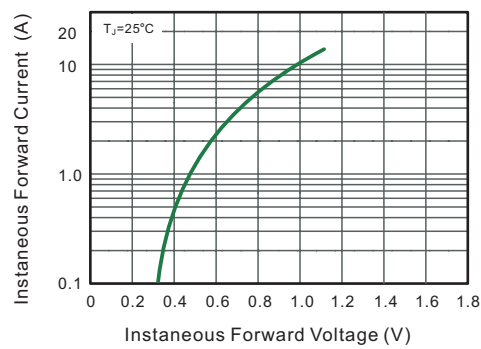


**Fig.4 Typical Junction Capacitance**

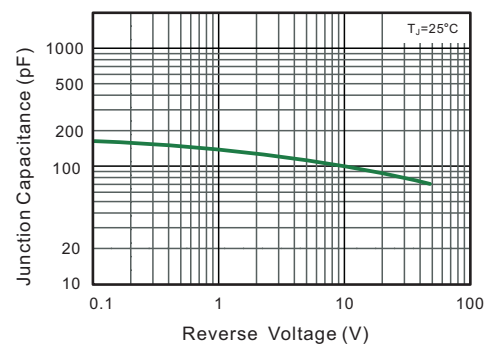

**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

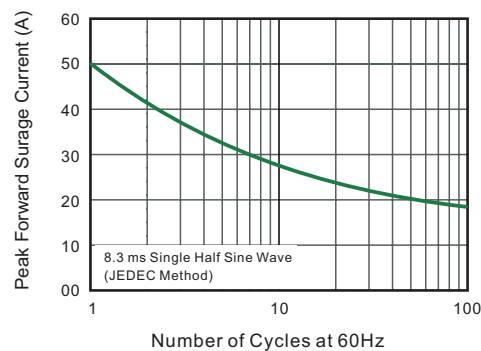


**Fig.6- Typical Transient Thermal Impedance**

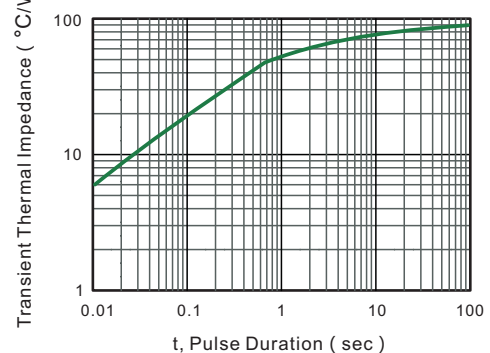

### PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SMAF

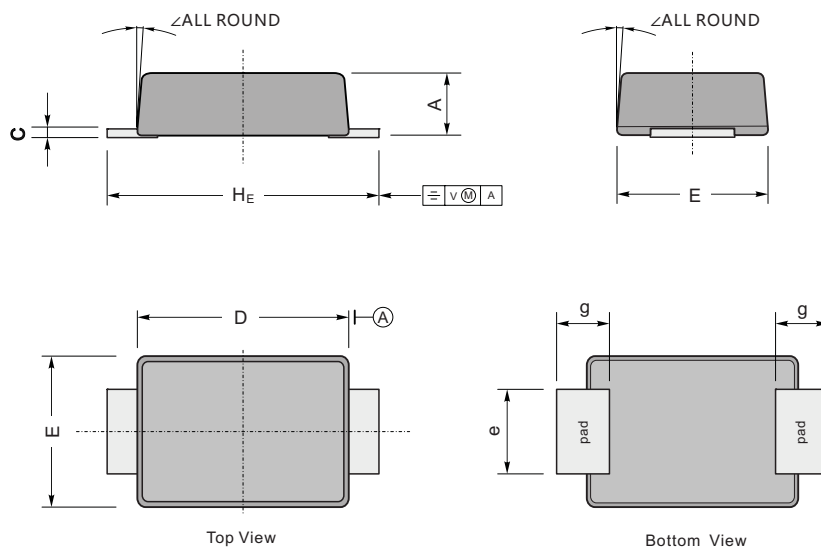

| UNIT |     | A   | C    | D   | E   | e   | g   | H <sub>E</sub> | ∠  |
|------|-----|-----|------|-----|-----|-----|-----|----------------|----|
| mm   | max | 1.2 | 0.20 | 3.7 | 2.7 | 1.6 | 1.2 | 4.9            | 7° |
|      | min | 0.9 | 0.12 | 3.3 | 2.4 | 1.3 | 0.8 | 4.4            |    |
| mil  | max | 47  | 7.9  | 146 | 106 | 63  | 47  | 193            |    |
|      | min | 35  | 4.7  | 130 | 94  | 51  | 31  | 173            |    |

### The recommended mounting pad size

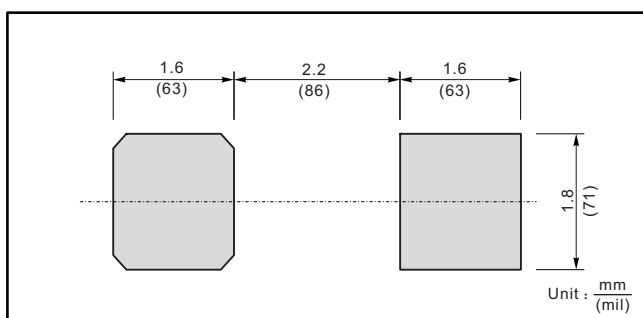

### Marking

| Type number | Marking code |
|-------------|--------------|
| SSL210F     | SL210        |